Numerical computation of resonance poles in scattering theory

Didier Felbacq

LASMEA UMR-CNRS 6602

Complexe des Cézeaux

63177 Aubière Cedex, France

arXiv:math-ph/0103046v1 30 Mar 2001

Abstract

We present a possible way of computing resonance poles and modes in scattering theory. Numerical examples are given for the scattering of electromagnetic waves by finite-size photonic crystals.

Resonance poles are the main quantity of interest in scattering theory [1,2]. They are poles of the scattering matrix, and may be considered as generalized eigenvalues to which generalized eigenmodes are associated. These poles are complex ones, i.e. they correspond to complex values of the energy in the scattering theory of Schrödinger equation and to complex frequencies for the scattering theory of Maxwell system.

When dealing for instance with finite size photonic crystals, i.e. periodic arrangements of scatterers that are finite in at least one direction of space [3], one cannot use Bloch waves theory to compute the electromagnetic properties of the structure and one has to retreat to the computation of the scattering matrix, that is the operator $S(k)$ such that $U = S(k) U^i$ where U^i is the harmonic incident field, with wavevector k, and U is the total field. The scattering matrix writes $S(k) = I_d + T(k)$ where $T(k)$ is the so-called scattering amplitude. Let us assume that there exists some pole k_p of T in some neighborhood $\mathcal{V}$ of the complex plane, then locally the scattering amplitude writes $T(k) = \frac{P_p}{k-k_p} + T_0(k)$ where P_p is a residu operator and T_0 is holomorphic in $\mathcal{V}$. Operator P_p is a finite rank operator and its range is precisely the kernel of $T^{-1}(k_p)$. It is define in an abstract way as the Cauchy integral:

$$P_p = \frac{1}{2i\pi} \oint T(z)\, dz \tag{1}$$

where integration takes place on a loop oriented in the direct sense enclosing the only pole k_p. Another way of defining the projection operator P_p is to define it as the following limit

$$P_p = s- \lim_{k \to k_p} (k - k_p)\, T(k) \tag{2}$$

The point of this note is to show that the first abstract definition (1) can be turned into a useful numerical tool for both the computation of the value of the pole and of the

residu operator, and hence the generalized eigenmode, whereas the second is useless. From a numerical point of view, we of course only deal with finite rank operators and the scattering amplitude admits a representation as an operator on $\ell^2(\mathbb{Z})$, that is as a matrix, in the usual meaning, acting on double complex sequences [4,5]. Once this representation is given, the residu operator can be computed provided that a region of the complex plane containing only one pole can be precised. This means that it suffices to know the value of the pole with a very poor precision to be able to compute the residu operator, which is not the case when the second definition (3) is used: in that last case numerical instabilities necessarily occur as it uses the product of a singular matrix by a term tending to zero, which is a very bad numerical situation. From a practical point of view, one has to define a path $\gamma : t \in [0,1] \rightarrow \gamma(t) \in \mathbb{C}$ whose graph is a loop enclosing k_p and to compute numerically the integral $\int_0^1 T(\gamma(t))\gamma'(t)\,dt$ for which any reasonable numerical method works. However a precise computation of the pole is useful when one wishes to compute a map of the electromagnetic field of the pole, for in that case a particular basis such as Hankel-Fourier series are used, i.e. the field is expanded on the basis $\left(H_n^{(1)}(k_p r)\exp(in\theta)\right)_{n\in\mathbb{Z}}$ [4,5]. A possible way is to use a Müller like algorithm [6] and to compute a zero of the determinant of $T^{-1}(k)$. However this matrix is generally badly conditionned and a better idea is to compute the smallest eigenvalue of $T^{-1}(k)$. This works well in case of a finite size crystal, but this is not always the case: for instance, when modelizing photonic crystals by stacks of gratings [7] and introducing periodic defects, convergence problems may occur when using Müller algorithm [8]. We suggest then to compute the following Cauchy integral:

$$\frac{1}{2i\pi}\oint zT(z)\,dz = k_p P_p. \tag{3}$$

Recalling that P_p has finite rank and hence has only a finite number of eigenvalues, a simple comparison of this last integral with P_p gives the value of k_p with a very good accuracy. Of course formula (3) only holds when k_p is a pole with multiplicity 1: this case is a very common one. One should not mistaken the range of P_p and the multiplicity of k_p: it is possible that the multiplicity of k_p is 1 while the rank of P_p is greater than 1 [9].

Let us now turn to some numerical applications. We deal with the structure depicted in figure 1. It is a collection of 7×7 homogeneous fibers with relative permittivity $\varepsilon = 9$, the radius of the rods $R = 1/2$ and the spacing is $d = 1$ (these values are given in arbitary units). We use a rigorous modal theory of diffraction to compute the scattering matrix of this system [4,5]. All the numerical results have been obtained using a standard PC computer. Removing a rod at the center of the crystal, a defect mode appears in the gap [10] (see fig. 2 for the transmission spectrum). To this peak in the transmission spectrum corresponds a pole k_p. The reference value that we use for convergence comparison is $k_p = 2.32919703586134 - 0.00378267987614i$. This value has been computed using Müller algorithm by minimising the smallest eigenvalue of T^{-1}. For this given value of k_p the smallest eigenvalue has modulus inferior to 10^{-14}. We then compute both Cauchy integrals (1,3). We use an integration path that is a triangle whose vertices have affixes: $(2.3, 2.4 - 0.1i, 2.4)$. We use the integration algorithm described in [11] and we denote by $k_{N,p}$ the numerical value obtained by using N points of integration, which we compare with the above value k_p which is the best numerical value that we can obtain . A very good precision is rapidly obtained (see fig. 3): for instance, using a discretisation of 15 points we obtain 6 exact figures though with such a

rough discretization we only get operator P_p with a low precision. In fact, it seems that the proportional coefficient between both integrals is not much affected by the precision with which P_p is computed. A finer computation of integral (1) gives the defect mode. The convergence can be checked by looking at the non-zero eigenvalue of P_p (fig. 4), here the reference eigenvalue (i.e. the best numerical value for a precision error of 10^{-15}) is obtained with $N = 150$. A much finer discretization than in the case of the pole is required to get a good representation of the defect mode, though the computing time is perfectly accessible with a very basic PC.

In conclusion, we have shown that it was possible to turn a rather abstract mathematical object into a useful numerical tool. This technique applies as well for any situation in which a meromorphic operator with non essential poles is involved, which is the usual case.

Figures captions

Figure 1: Sketch of the 2D photonic crystal. The transmission ratio is computed as the flux of the Poynting vector through the segment indicated below the crystal.

Figure 2: Transmission ratio versus the wavenumber for an incident plane wave.

Figure 3: Convergence of the value of the pole versus the number of integration points.

Figure 4: Convergence of the eigenvalue of the projection operator versus the number of integration points.

REFERENCES

[1] R. B. Melrose, *Geometric scattering theory*, Cambridge University Press, 1995.

[2] M. Reed, B. Simon, *Methods of Modern Mathematical Physics*, vol. III, Academic Press, 1979.

[3] J. Joannopoulos, R. Meade, J. Winn, *Photonic Crystals*, Princeton University Press, 1995.

[4] D. Felbacq, G. Tayeb, D. Maystre, *Scattering by a set of parallel cylinders*, J. Opt. Soc. Am. A **11** (1994) 2526-2538.

[5] E. Centeno, D. Felbacq, *Rigorous Vector Diffraction of electromagnetic waves by bidimensional Photonic Crystals*, J. Opt. Soc. Am. A. **17** (2000) 320-327.

[6] W. H. Press, B. P. Flannery, S. A. Teukolsky, W.T. Vetterling, *Numerical Recipes*, Cambridge University Press, 1989.

[7] A. A. Asatryan & *al.*, *Effects of disorder on wave propagation in two-dimensional photonic crystals*, Phys. Rev. E **60** (1999) 6118-6127.

[8] R. Smaâli, D. Felbacq, G. Granet, *Dynamical system approach to wave propagation in photonic crystals*, in preparation.

[9] D. Felbacq, *Scattering theory of photonic crystals*, in preparation.

[10] E. Centeno, D. Felbacq, *Characterization of defect modes in finite bidimensional photonic crystals*, J. Opt. Soc. Am. A **16** (1999) 2705-2712.

[11] P. Helluy, S. Maire, P. Ravel, *Intégration numérique d'ordre élevé de fonctions régulières ou singulières sur un intervalle*, C.R. Acad. Sci. Paris **327** (1998) 843-848.

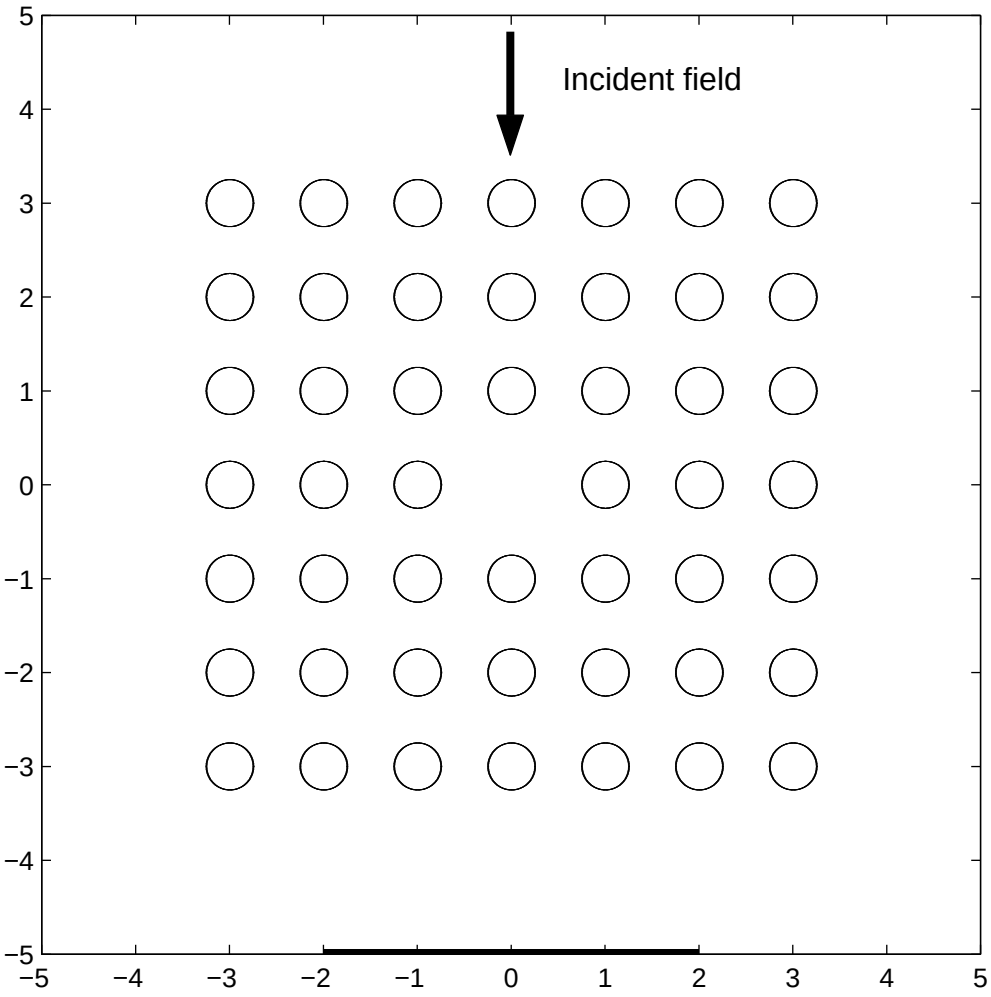
Incident field
5
4
3
2
1
0
−1
−2
−3
−4
−5
−5
−4
−3
−2
−1
0
1
2
3
4
5

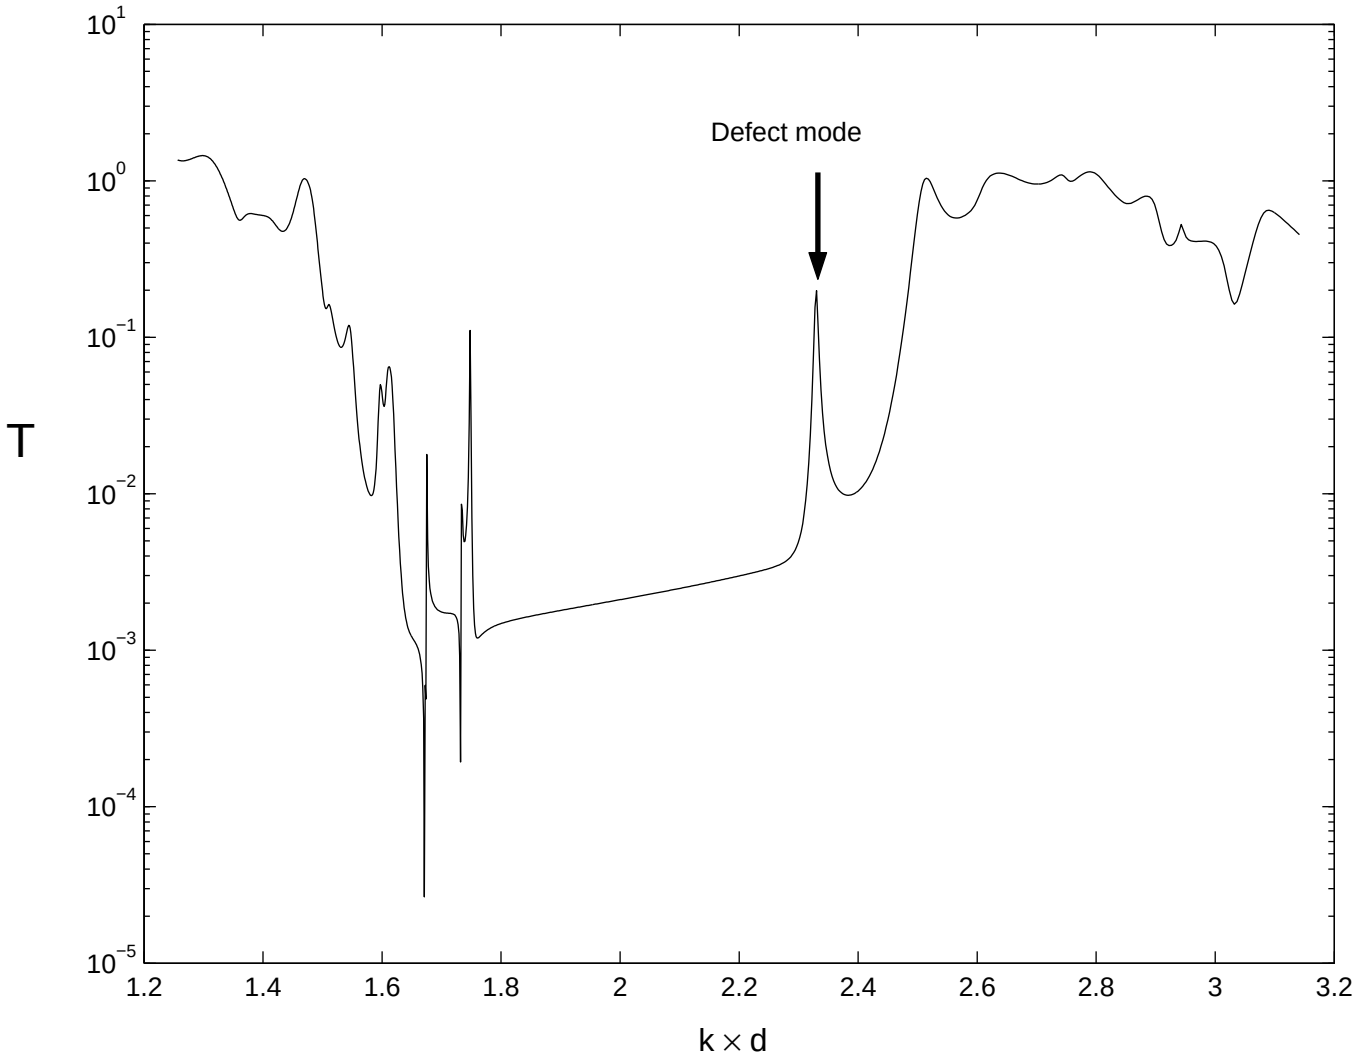
Defect mode
T
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
1.2
1.4
1.6
1.8
2
2.2
2.4
2.6
2.8
3
3.2
k × d

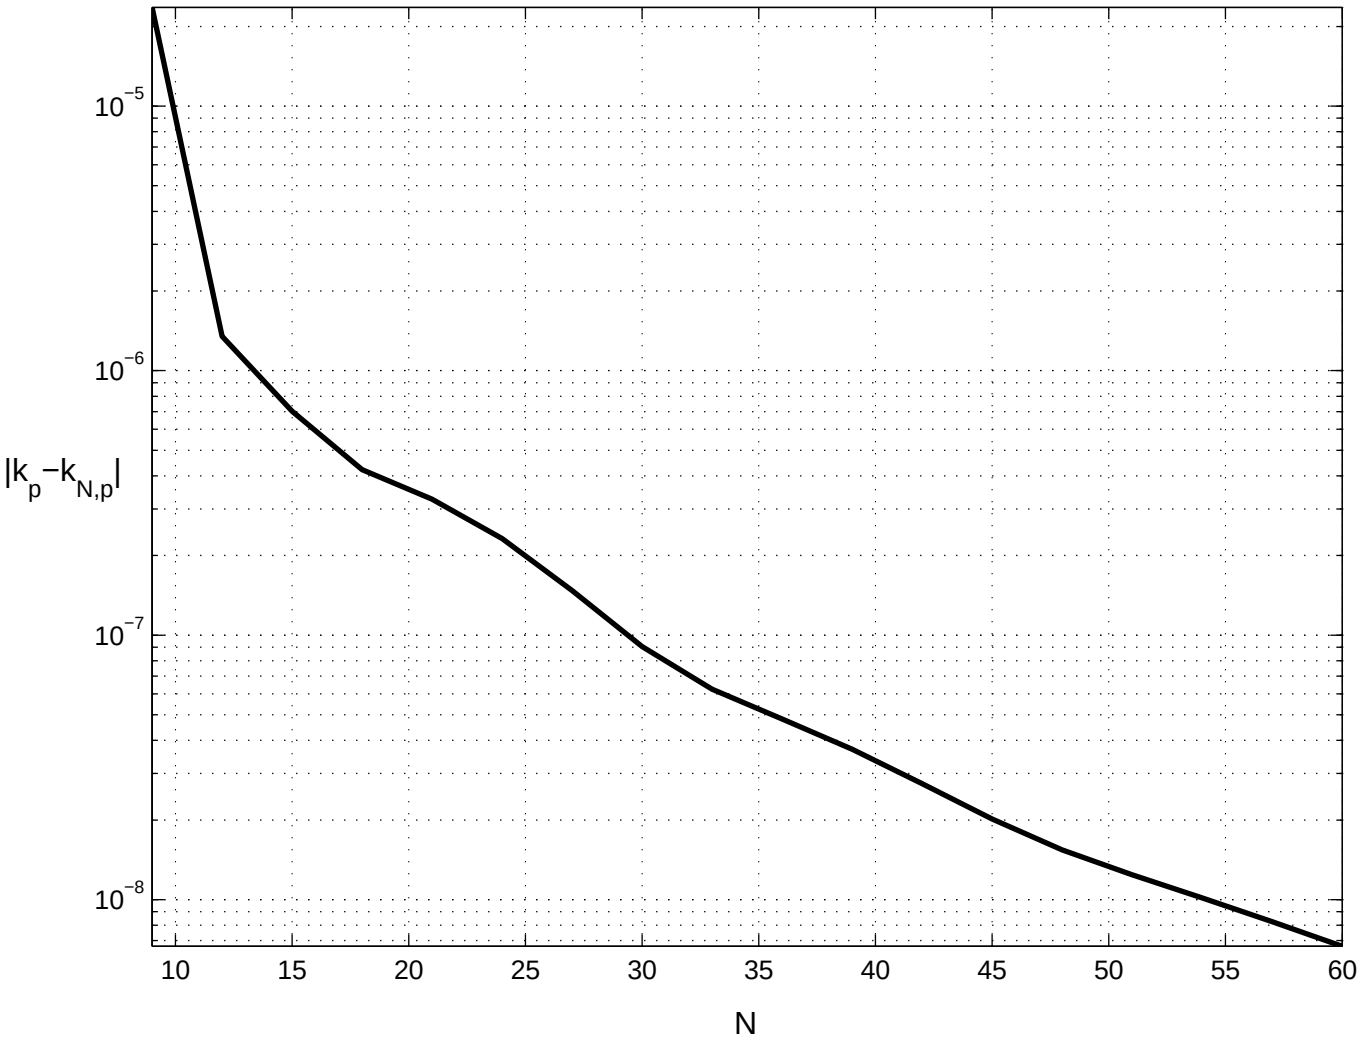
10^{-5}
10^{-6}
10^{-7}
10^{-8}
$|k_p - k_{N,p}|$
10
15
20
25
30
35
40
45
50
55
60
N

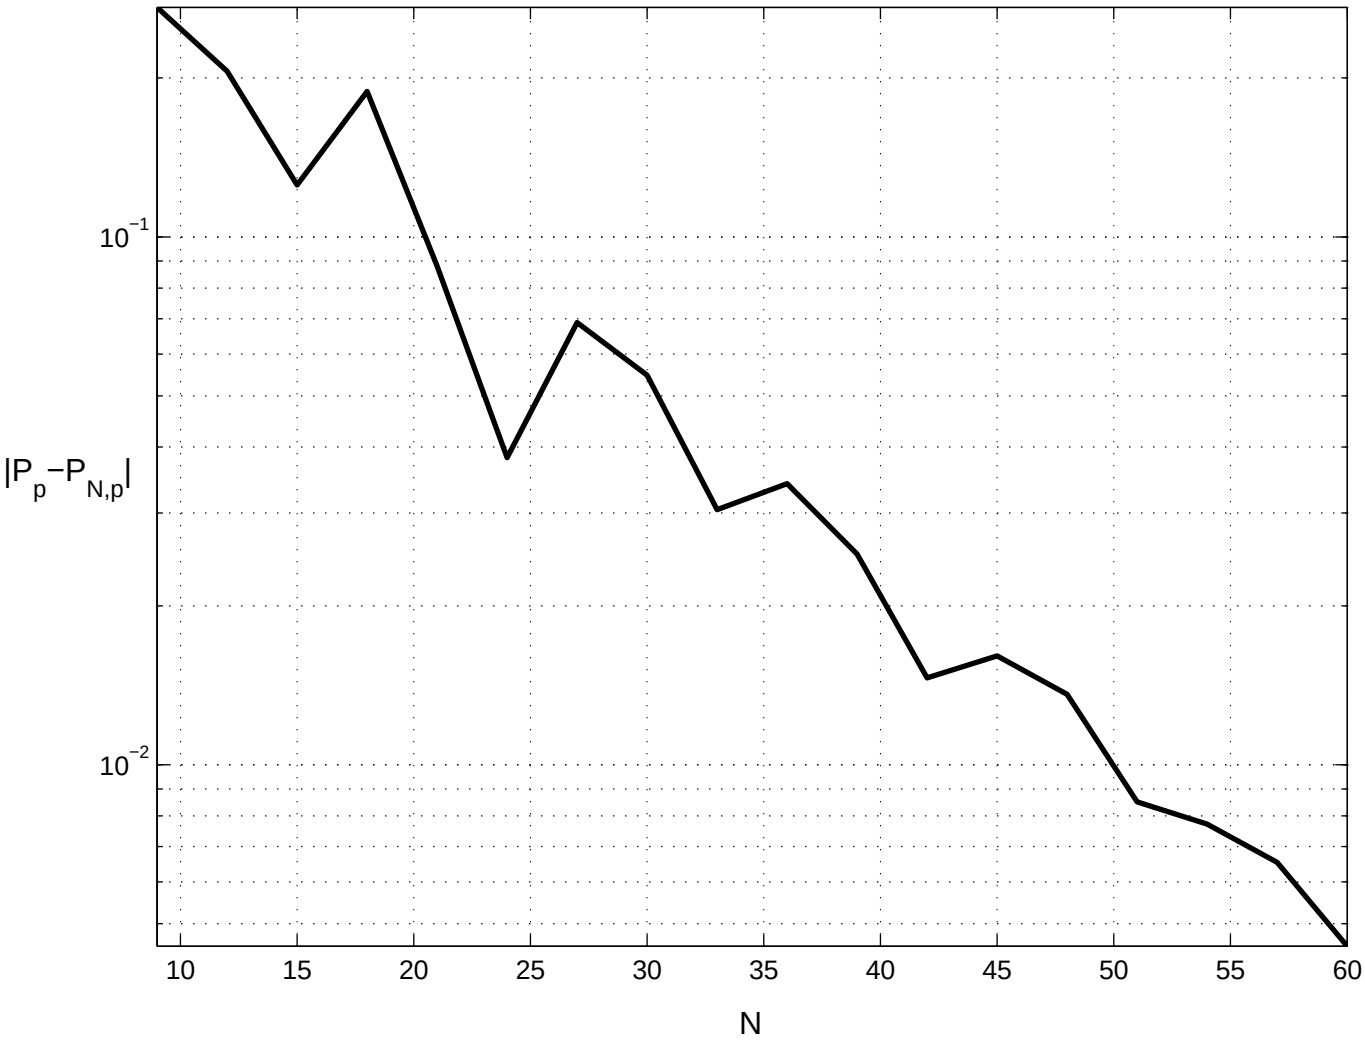
10^{-1}
10^{-2}
$|P_p - P_{N,p}|$
10
15
20
25
30
35
40
45
50
55
60
N